Model Number	FiB-2002	CiB-2002F	3FiC-372	FiC-542/UK	FiS-812	CiV-820
Capacity						
Gross volume refrigerator (litre)	378	n/a	192	142	136	n/a
Usuable volume refrigerator (litre)	374	n/a	189	141	133	n/a
Gross volume freezer (litre)	n/a	267	84	112	n/a	115
Usuable volume freezer (litre)	n/a	241	75	98	n/a	86
Total gross volume (litre)	378	267	276	254	136	96
Total usable volume (litre)	374	241	264	239	133	86
General features						
Compressors	1	1	1	1	1	1
Reversable doors	▪	▪	▪	▪	▪	▪
Side by side combinations	▪	▪	n/a	n/a	▪	▪
Antibacteria Biocare inner liner				▪		
Refrigerator features						
Listeria thermostat		n/a			▪	n/a
Vegetable tray	glass	n/a	glass	glass	glass	n/a
Hidden evaporator	▪	n/a	▪	▪	▪	n/a
Automatic cyclical defrosting	▪	n/a	▪	▪	▪	n/a
Automatic evaporation	▪	n/a	▪	▪	▪	n/a
Interior light	▪	n/a	▪	▪	▪	n/a
Bottle shelves	▪	n/a	▪	▪	▪	n/a
Egg rack	1	n/a	1	1	1	n/a
Number of trays	4	n/a	4	3	2	n/a
Glass shelves	6	n/a	3	3	2	n/a
Vegetable drawers	1	n/a	2	1	1	n/a
Drain	▪	n/a	▪	▪	▪	n/a
Door balconies	5	n/a	4	5	2	n/a
Freezer features						
Drawers	n/a	7	3	4	n/a	3
Ice trays	n/a	2	▪	1	n/a	1
4-star freezer	n/a	▪	▪	▪	n/a	▪
Dimensions						
Built-in aperture H/W/D (mm)	1970-2070/600/560	1970-2070/600/560	1776/560/555	1776/560/555	820-880/600/550	820-880/600/550
Overall H/W/D (mm)	1970-2070/598/560	1970-2070/598/560	1770/540/545	1775/540/545	819-889/595/548	819-889/596/545
Packed H/W/D (mm)	2050/650/620	2050/650/690	1834/584/600	1835/585/650	883/659/586	880/635/600
Net weight (kg)	60.5	65	56	62	31.5	33
Gross weight (kg)	65	71	62	64	34.5	35
Door fitting	Door to Door	Door to Door	Slider System	Slider System	Door to Door	Door to Door
Consumption						
Climate Class+	SN/T	SN/T	SN-ST	SN	N	N
Energy Class	A+	A+	A+	A+	A+	A+
Electricity consumption (kWh/24h)	0.42		0.86	0.86	0.41	0.5
Electrocity consumption (kWh/year)	153	315	314	314	150	182
Freezer power (kg/24h)	n/a	23	6	8	n/a	8
Gas	R600a	R600a	R600a	R600a	R600a	R600a
Electrical Connection						
Total connected load (W)	90	130	140	140	100	90
Connection	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Fuse rating (Amp)	13	13	13	13	13	13

+ Climate class SN: Room temperature between +10°C & +32°C
+ Climate class N: Room temperature between +16°C & +32°C

~3FiC-372

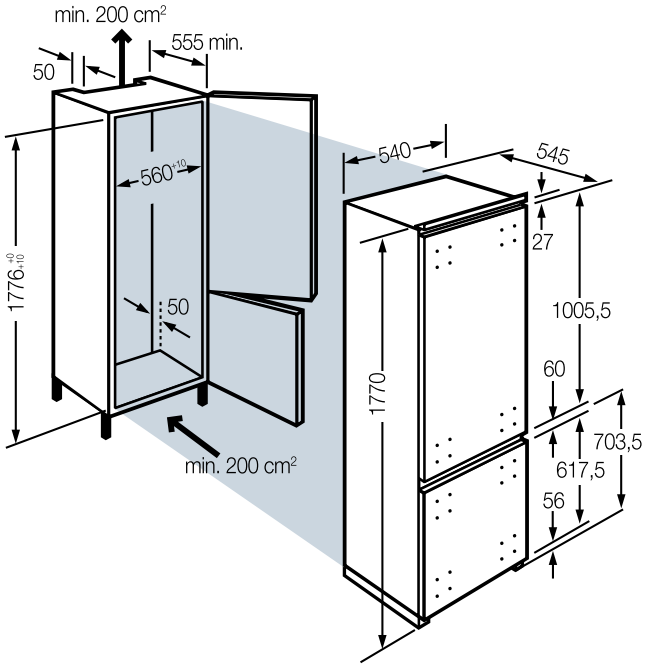

~FiC-542/UK

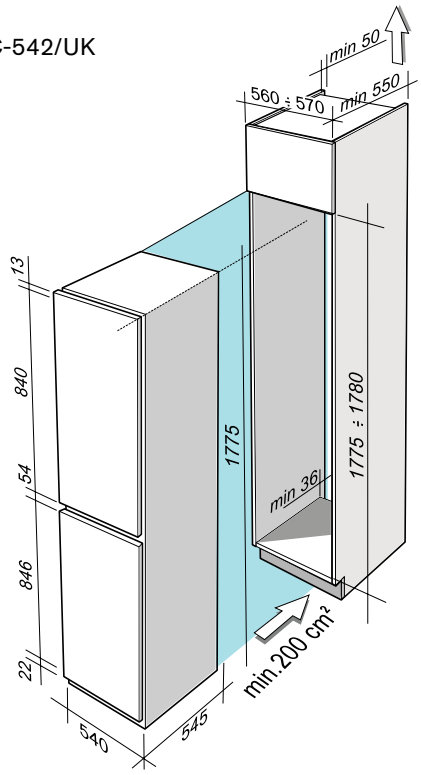

~FiB-2002
~CiB-2002F

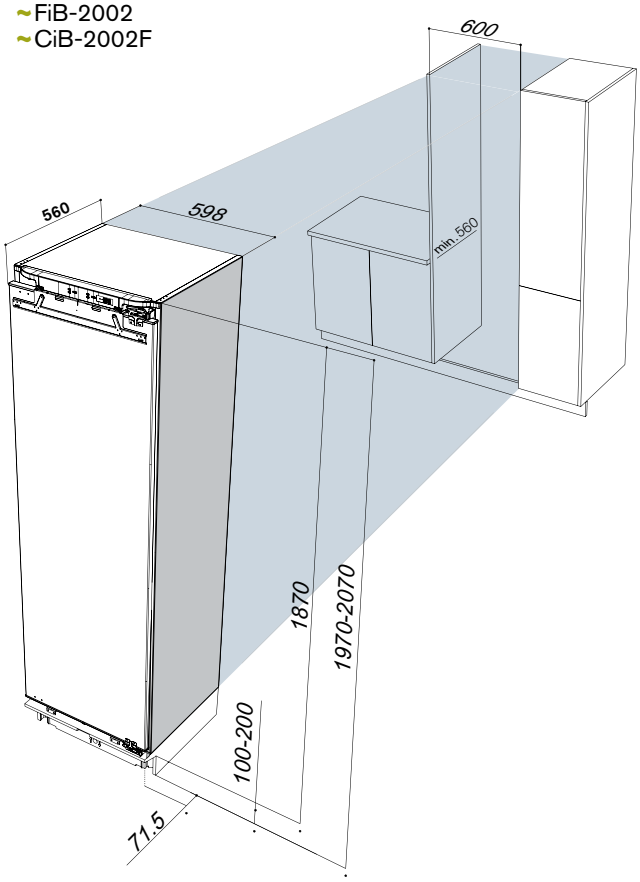

~FiS-812
~CiV-820